

ITEM MATERIALS

1)—EXTRA-STRENGTH VCP % BEND WITH TRANSITION BAND SEAL COUPLING WITH OUTSIDE TYPE 316SS SHEAR RING FOR 4-INCH SINGLE FAMILY OR 6-INCH MULTI-FAMILY RESIDENTIAL SERVICES.

- 2 PIPE CAP.
  - (3)—EXTRA-STRENGTH VCP WYE BRANCH FITTING.
- 4-INCH PVC SEWER PIPE, SDR-26, FOR SINGLE FAMILY RESIDENTIAL SERVICES. 6-INCH PVC SEWER PIPE, SDR-26, FOR MULTI-FAMILY RESIDENTIAL SERVICES.
  - 5 2-INCH PVC SCH. 40 PIPE WITH CAP TO MARK STUB-OUT (REMOVE UPON COMPLETION OF CONNECTION TO ON-SITE SEWER LATERAL).

#### NOTES:


- 1. LATERAL SIZE TO BE DETERMINED ON THE BASIS OF TOTAL NUMBER OF FIXTURE UNITS, BUT IN NO CASE SHALL THE LATERAL DIAMETER BE LESS THAN FOUR INCHES FOR SINGLE FAMILY RESIDENTIAL BUILDINGS; NOR LESS THAN SIX INCHES FOR MULTIPLE FAMILY RESIDENTIAL.
- 2. ¾-INCH CRUSHED ROCK.
- 3. TRENCH BACKFILL PER CITY STD. DWG. 150.
- 4. INSTALL CAP AND STUB-OUT MARKER WHERE LATERAL IS NOT YET CONNECTED TO ON-SITE SEWER.

#### SINGLE FAMILY AND MULTI-FAMILY RESIDENTIAL

NOT TO SCALE

### SEWER LATERAL ON NEW SEWER

REVISION			APPROVED:	7/16/2019		CITY OF COBONIA
NO.	APPROVED	DATE	Nelson D Nelson	7/16/2018	The word	CITY OF CORONA
1		10/10/16	NELSON D. NELSON, PE, PUBLIC WORKS DIRECTOR		*CORONA	OTD 704
2	VRW	07/16/18	Vernon R. Weisman	7/16/2018	THE CIRCLE CITY	SID 301
			VERNON R. WEISMAN, PE, DISTRICT ENGINEER	DATE	- 10 PM	SHEET 1 OF 2

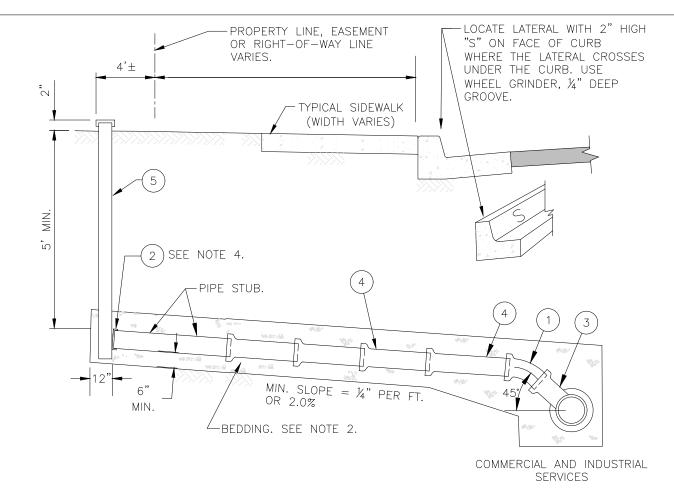

### ITEM MATERIALS

- 1 EXTRA-STRENGTH VCP 1/8 BEND FOR 6-INCH AND LARGER COMMERCIAL AND INDUSTRIAL SERVICES.
- (2)———PIPE CAP.
  - (3)—EXTRA-STRENGTH VCP WYE BRANCH FITTING.
- 4)——6-INCH AND LARGER EXTRA-STRENGTH VCP SEWER PIPE FOR COMMERCIAL AND INDUSTRIAL SERVICES.
  - 5 2-INCH PVC SCH. 40 PIPE WITH CAP TO MARK STUB-OUT (REMOVE UPON COMPLETION OF CONNECTION TO ON-SITE SEWER LATERAL).

#### NOTES:

- 1. LATERAL SIZE TO BE DETERMINED ON THE BASIS OF TOTAL NUMBER OF FIXTURE UNITS, BUT IN NO CASE SHALL THE LATERAL DIAMETER BE LESS THAN 6 INCHES FOR COMMERCIAL OR INDUSTRIAL BUILDINGS.
- 2. ¾-INCH CRUSHED ROCK.
- 3. TRENCH BACKFILL PER CITY STD. DWG. 150.
- 4. INSTALL CAP AND STUB-OUT MARKER WHERE LATERAL IS NOT YET CONNECTED TO ON-SITE SEWER.

# COMMERCIAL AND INDUSTRIAL

NOT TO SCALE

## SEWER LATERAL ON NEW SEWER

REVISION			APPROVED:	7/16/2018		CITY OF CORONA
NO.	APPROVED	DATE	Nelson D Nelson	7/10/2018	CORONA THE CIRCLE CITY Expenses Fry ** Seed	CIT OF CORONA
1		10/10/16	PUBLIC WORKS DIRECTOR	7/16/2018		OTD 704
2	VRW	07/16/18				SID 301
			VERNON R. WEISMAN, PE, DISTRICT ENGINEER	DATE	10 Pt 10 Pt	SHEET 2 OF 2