


SECTION "A-A"

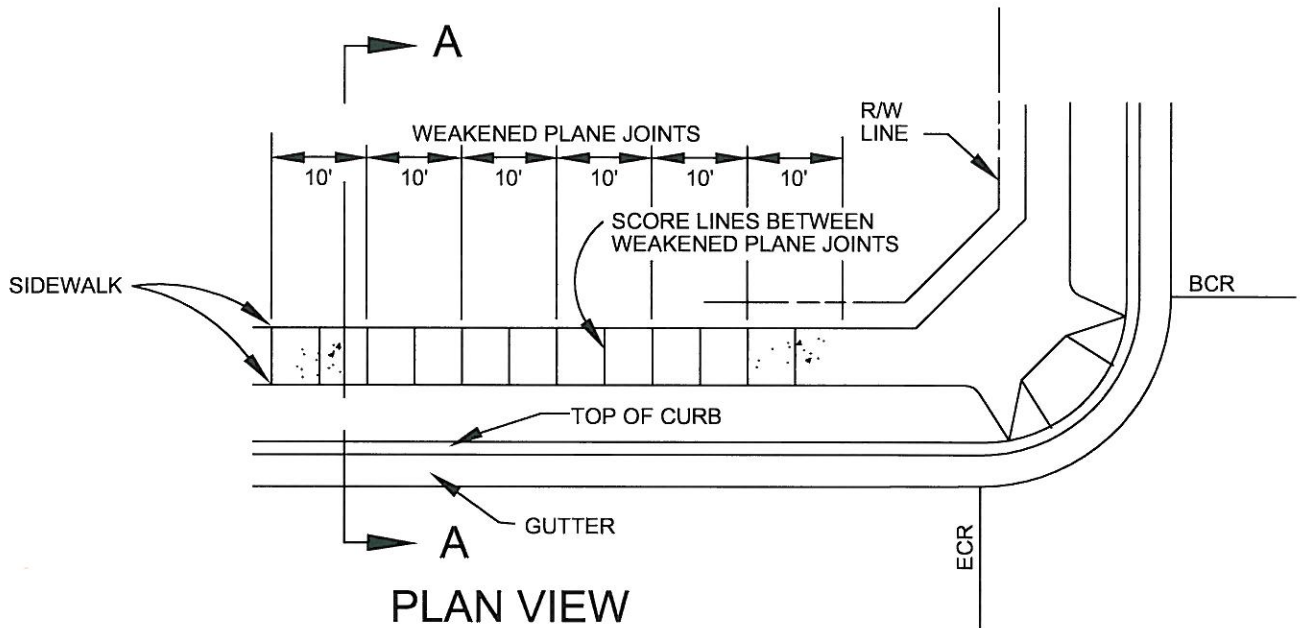

PLAN VIEW

NOTES:

1. THICKNESS OF SIDEWALK SHALL BE 4" EXCEPT IN DRIVEWAY APRONS WHERE 6" IS REQUIRED FOR RESIDENTIAL DRIVEWAYS AND 8" IS REQUIRED FOR COMMERCIAL DRIVEWAYS.
2. SIDEWALK SHALL HAVE 1-1/2" DEEP WEAKENED PLANE JOINTS AT INTERVALS SHOWN HEREON. JOINTS SHALL HAVE EDGES WITH 1/8" RADII.
3. CONCRETE SHALL BE CLASS 560-C-3250, CURE WITH CURING COMPOUND.
4. PARKWAY FROM CURB TO PROPERTY LINE TO BE BROUGHT TO GRADE BY CONTRACTOR BEFORE FINAL APPROVAL AND COMPACTED TO 90%.
5. SIDEWALKS SHALL BE FORMED IN SUCH A MANNER AS TO MAINTAIN 36" MINIMUM OF UNOBSTRUCTED PEDESTRIAN WAY AT ALL LOCATIONS, INCLUDING BUT NOT LIMITED TO STREET LIGHTS, POWER POLES, AND FIRE HYDRANTS.
6. NO FELT SHALL BE USED AT JOINTS UNLESS OTHERWISE APPROVED BY THE PUBLIC WORKS DIRECTOR.



APPROVED BY:  
*Kip D. Field* 11/23/09  
 CITY ENGINEER DATE  
 KIP D. FIELD

CITY OF CORONA

SIDEWALK

REVISION	DESCRIPTION	BY	DATE

STANDARD PLAN NUMBER: 142 SHT 1 of 1