



PLAN

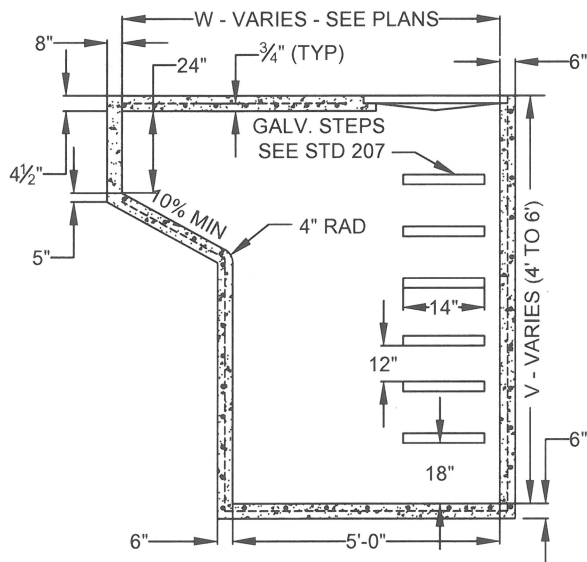

LONGITUDINAL SECTION

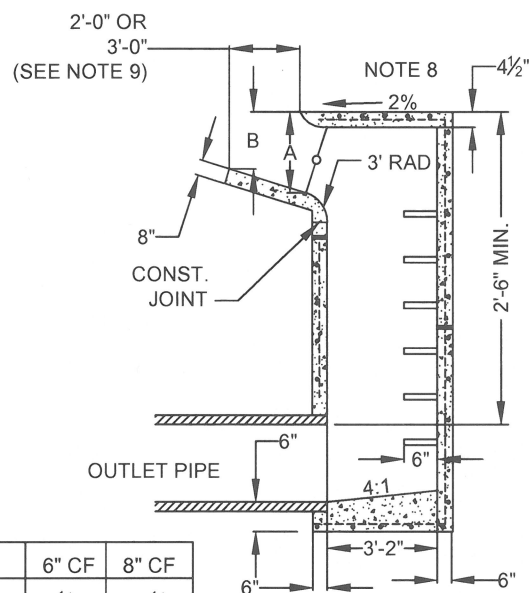

CROSS SECTION

	6" CF	8" CF
A	9 1/2"	11 1/2"
B	4"	6"

NOTES:

1. PLACE ONE 3/4" DIAMETER SUPPORTING BOLT FOR EVERY 6' LENGTH OF OPENING, SPACED EVENLY OVER THE ENTIRE OPENING.
2. WHERE SIDEWALK EXISTS ADJACENT TO CATCH BASIN, TOP SLAB SHALL BE EXTENDED TO JOIN SIDEWALK. TRANSVERSE STEEL IN TOP SLAB SHALL EXTEND 12" BEYOND WALK.
3. SEE STANDARD PLAN 212 FOR REINFORCING.
4. LOCAL DEPRESSION SHALL BE 8" THICK.
5. ALL METAL SHALL BE GALVANIZED AFTER FABRICATION.
6. ALL CONCRETE SHALL BE 560-C-3250.
7. WHEN "W" EXCEEDS 15', PROVIDE MANHOLE AT EACH END.
8. SEE STANDARD PLAN 210 AND 211 FOR FACE PLATE AND PROTECTION BARS.
9. LOCAL DEPRESSION MAY BE OMITTED AND STANDARD GUTTER WIDTH FOR INLETS WITH A STREET GRADE OF 6% OR MORE.

REVISIONS:			APPROVED BY: <i>Kip D. Field</i>	11/23/09	CITY OF CORONA
NO.	DATE	APPRV'D			
1	3-16-16	<i>777</i>	KIP D. FIELD		CATCH BASIN TYPE "A"
			RCE NO. 45679	EXP. DATE 12-31-16	STANDARD PLAN NUMBER: 204
					SHT 1 OF 1