



INSTALLATION


NOTE: GUARD RAILING FLARES AT BRIDGE APPROACHES SHALL HAVE A MINIMUM RADIUS OF 150'.

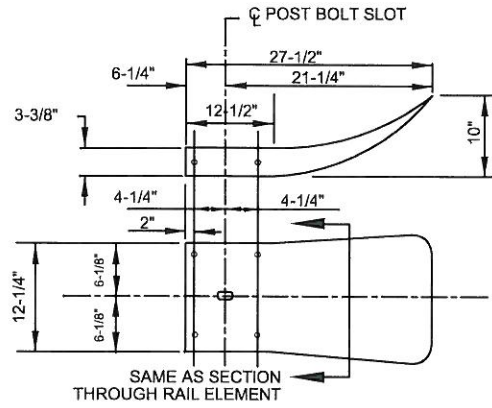

TERMINAL SECTION

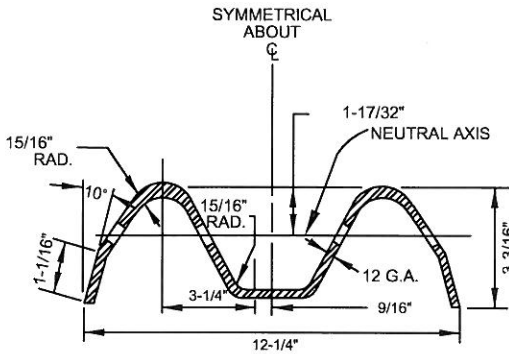


SECTION THROUGH RAIL ELEMENT

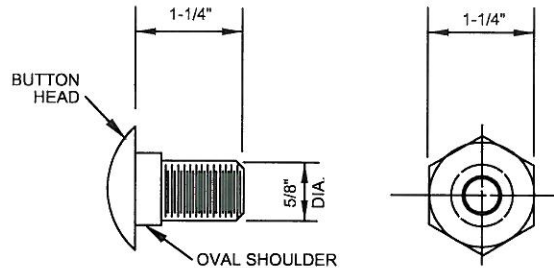


SPLICE BOLT AND NUT


POST BOLT: SIMILAR EXCEPT LENGTH

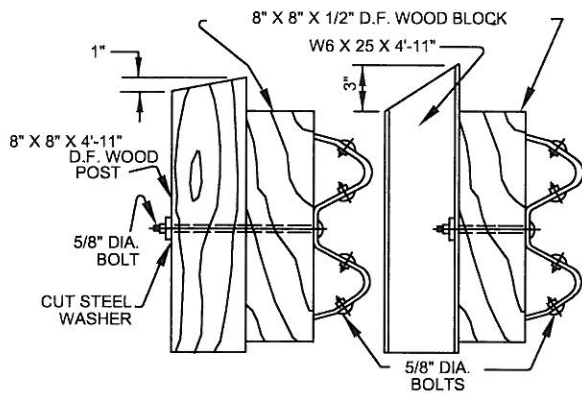

ARRANGEMENT OF POSTS

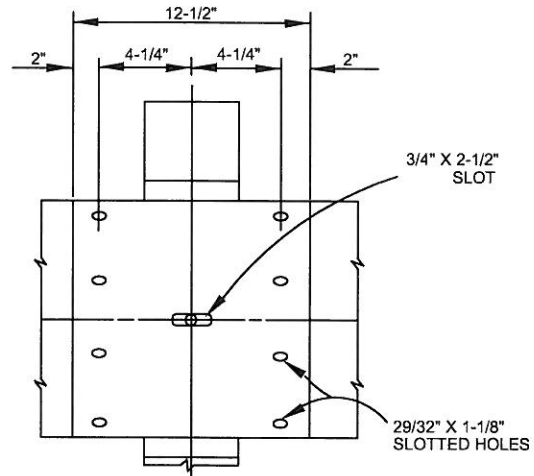

RAIL SPLICE



APPROVED BY: *Kip D. Field* 11/23/09
 CITY ENGINEER DATE
 KIP D. FIELD

CITY OF CORONA

METAL BEAM GUARD RAILING NOTES

REVISION	DESCRIPTION	BY	DATE

STANDARD PLAN NUMBER: **525** SHT 1 OF 1