


SEE DETAIL "A"

MILDEST STREET
SLOPE

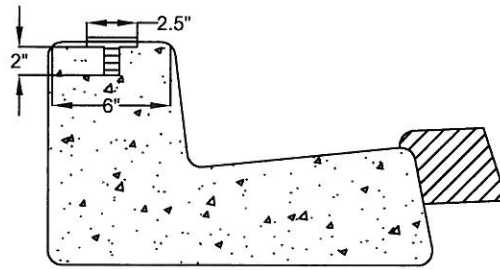

DETAIL "A"

2.5" DIAMETER SOLID BRASS DISK
WITH DOMED HEAD AND 2" RIBBED
SHANK PERMANENTLY AFFIXED
TO CURB.

SURVEYOR TO PROVIDE DESCRIPTION
OF LOCATION AND TYPE OF BENCHMARK.

NOTE:

1. ALL BENCHMARKS SHALL BE WITHIN STREET RIGHT OF WAY.
2. BENCHMARKS SET IN TOP OF CURB SHALL BE APPROX. FIVE FEET FROM THE ECR WHEN CURB DOES NOT EXIST, CONCRETE CYLINDER OR APPROVED EQUIVALENT SHALL BE USED.
3. BENCHMARKS SHALL BE LOCATED ON THE CURB OF THE MILDEST SLOPING STREET WHEN POSSIBLE.
4. BENCHMARKS DESTROYED DURING CONSTRUCTION WILL BE REESTABLISHED BY ORIGINAL METHOD OF ESTABLISHMENT. FULL COST OF RE-ESTABLISHMENT TO BE BORNE BY PARTY RESPONSIBLE FOR DESTROYING ORIGINAL BENCHMARK.



APPROVED BY:

Kip D. Field

11/23/09

CITY ENGINEER

DATE

KIP D. FIELD

CITY OF CORONA

BENCHMARK DESCRIPTION
AND LOCATIONS

REVISION	DESCRIPTION	BY	DATE

STANDARD PLAN NUMBER: **154**

SHT 1 OF 1