



## CURB MARKER PLACEMENT STANDARD

These are the basic guidelines for placement of the curb markers within the City of Corona.

Each storm drain location should be labeled similarly.

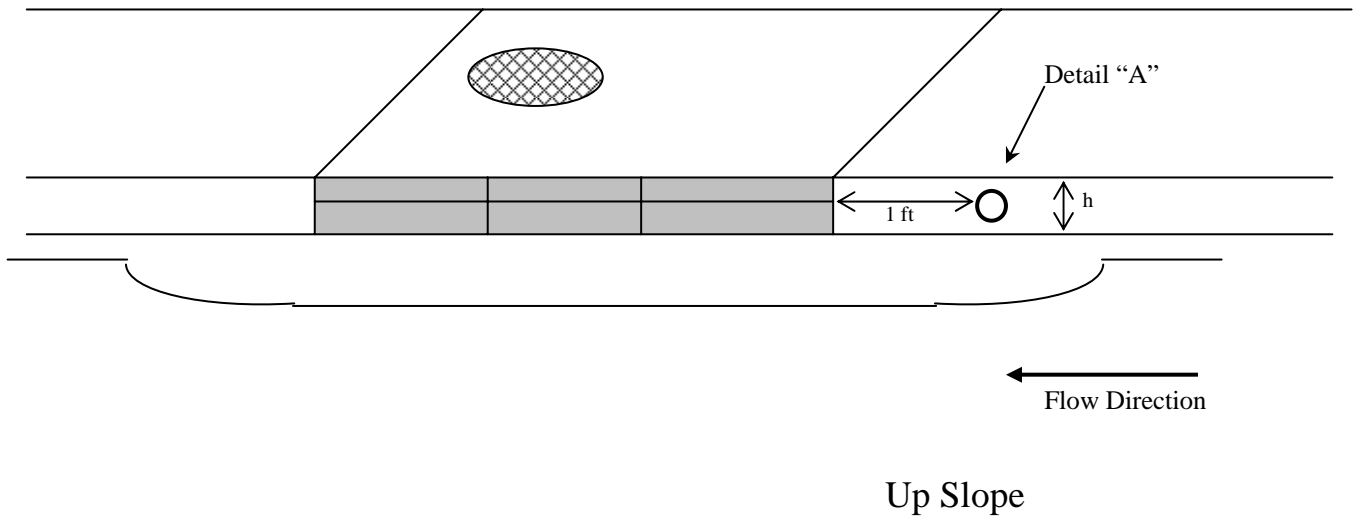

Label shall be located approximately 1-foot horizontally from the up-slope side of the storm drain and centered vertically  $\frac{1}{2} h$ , where "h" is the curb height. Curb marker shall be laminated with message, size and blue color per Detail "A" and ordered through City of Corona or ACP International, or equivalent manufacturer of storm drain marker. Marker shall be bonded to curb with polyurethane based elastomeric adhesive, Sikaflex-221 or equivalent, as provided. Surface shall be clean, dry, and free of any loose debris before label applied. Follow adhesive instructions per manufacturer. Any variations must be approved by Public Works Director.



Detail "A"